

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


3/8" x 7/32" 06B-1 9,525 x 5,72 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	9,525	5,72	6,35

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	10,0	1	5,3	-	-	-	-

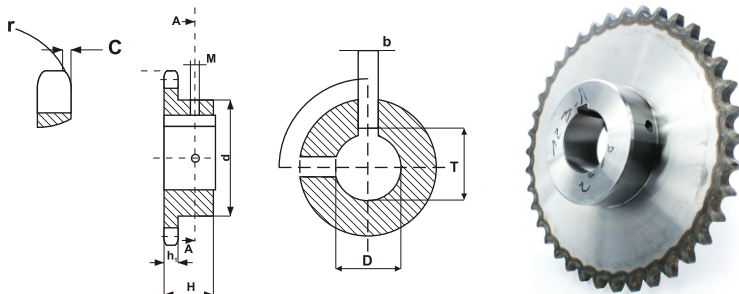

Mat. Stal C45 E - UNI EN 10083-1

ISO R606/ DIN 8187

Z	D	H	d	Z	D	H	d	Z	D	H	d
10	10	22	-	16	24	28	0	21	18	28	-
	11		24		42		19		-		
	12		26		0		20		-		
	14		29		0		22		-		
11	10	25	24	17	15	28	0	22	24	28	-
	12		26		0		25		-		
	14		29*		40		16		-		
	15		30*		0		18		-		
12	16	25	31*	18	19	28	0	23	15	28	-
	10		25		0		16		-		
	12		26		0		18		-		
	14		29		42		19		-		
13	15	25	-	19	20	28	0	24	18	28	-
	16		31*		0		16		-		
	18		35*		0		18		-		
	12		-		0		19		-		
14	14	25	-	20	22	28	0	25	20	28	52
	15		-		0		22		-		
	16		-		0		24		-		
	18		-		0		25		-		
15	19	25	35	21	24	28	0	24	15	28	-
	12		-		0		16		-		
	14		-		0		18		-		
	15		34		45		19		-		
16	16	28	-	20	20	28	0	25	20	28	54
	18		-		0		22		-		
	19		35		0		24		-		
	20		36		0		25		-		
17	22	28	38	21	22	28	0	24	16	28	-
	24		-		0		18		-		
	25		42*		0		19		-		
	12		-		0		20		-		
18	14	28	-	22	24	28	0	25	20	28	57
	15		-		0		22		-		
	16		-		0		24		-		
	18		-		0		25		-		
19	16	28	-	23	15	28	0	24	19	28	-
	18		-		0		20		-		
	19		-		0		22		-		
	20		-		0		24		-		
20	18	28	-	24	24	28	0	28	24	28	60
	14		-		0		25		-		
	15		-		0		15		-		
	16		-		0		16		-		
21	18	28	-	25	18	28	0	30	30	28	-
	19		-		0		20		-		
	20		-		0		22		-		
	22		-		0		24		-		

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


1/2" x 5/16" 08B-1 12,7 x 7,75 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	12,7	7,8	8,5

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	13	1,3	7,2	-	-	-	-

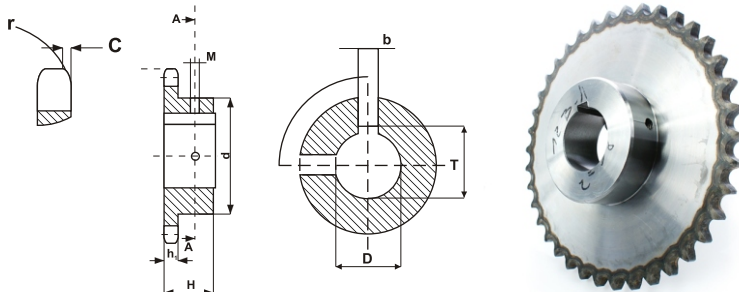

Mat. Stal C45 E - UNI EN 10083-1

ISO R606/ DIN 8187

Z	D	H	d	Z	D	H	d	Z	D	H	d	Z	D	H	d			
10	12	25	26	15	16	28	-	18	38	28	-	22	30	28	-			
	14		29				-				16				-			
	15		30				-				18				-			
	16		31				-				19				-			
11	12	25	-	15	22	28	45	19	24	28	-	23	25	28	-			
	14		29				-				20				-			
	15		30				-				22				-			
	16		31				-				24				-			
	18		34				-				25				-			
	19		35				-				28				-			
	20		36				-				30				-			
12	12	28	-	16	22	28	49	20	24	28	64	24	25	28	70			
	14		-				15				-				18	-	28	-
	15		33				16				-				19	-	20	-
	16		-				18				-				20	-	22	-
	18		-				19				-				22	-	24	-
	19		35				20				-				24	-	25	-
	20		36				22				50				25	-	28	-
	22		38				24				-				28	-	30	-
	24		41*				25				-				30	-	32	-
	25		42*				28				-				32	53	35	-
13	12	28	-	17	22	28	-	21	24	28	-	25	28	28	-			
	14		-				15				-				18	-	25	-
	15		-				16				-				19	-	28	-
	16		-				18				-				20	-	30	-
	18		37				19				-				22	-	32	-
	19		-				20				-				24	-	35	-
	20		-				22				-				25	-	38	-
	22		-				24				-				28	-	35	-
	24		-				25				-				30	-	38	-
	25		42				28				-				32	-	35	-
14	12	28	-	18	24	28	-	14	20	28	70	30	30	30	-			
	14		-				16				-				18	-	32	-
	15		-				18				-				19	-	35	-
	16		-				19				-				20	-	38	-
	18		-				20				-				22	-	35	-
	19		-				22				-				24	-	38	-
	20		-				25				-				28	-	35	-
	22		-				28				56				19	-	38	-
15	12	28	45	18	24	28	-	14	20	28	-	30	30	30	-			
	14		-				16				-				18	-	32	-
	15		-				18				-				19	-	35	-

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


5/8" x 3/8" 10B-1 15,875 x 9,65 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	15,875	9,7	10

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	16	1,6	9,1	-	-	-	-

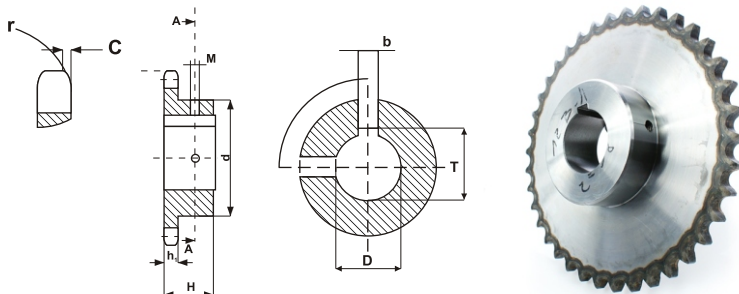

Mat. Stal C45 E - UNI EN 10083-1

ISO R606/ DIN 8187

Z	D	H	d	Z	D	H	d	Z	D	H	d	Z	D	H	d		
	15	-	-		28	-	-	19	42	30	70		30	-	-		
10	16		35	14	30	30	52		19		-	22	32		-		
	19	25	35			32		-		20			-		35	30	80
	20		-			19		-		22			-		38		80
	24		42*			20		-		24			-		40		-
11	15		-		22		-		25		-		42		-		
	16		-		24		-	19	28	30	-		19		-		
	18		37	15	25	30	57			30		70		20		-	
	19	30	-			28		-		32		-		22		-	
	20		-		30		-		35		-		24		-		
	24		42		32		-		38		-		25		-		
	25		42		35		-		40		-	23	28	30	80		
28		45		19		-		42		-			30		80		
12	15		-		20		-		19		-		32		-		
	16		-		22		-		20		-		35		-		
	18		-		24		-		22		-		38		-		
	19		42	16	25	30	60		24		-		40		-		
	20		-			28		60		25		-		42		-	
	22	30	-		30		-		28	30	75		19		-		
	24		-		32		-	20	30		-		20		-		
	25		44		35		-			32		-		22		-	
	28		47		38		-		35		-		24		-		
	30		49		19		-		38		-		25		-		
32		51		20		-		40		-	24	28	30	80			
		-		22		-		42		-			30		80		
13	15		-		24		-		19		-		32		-		
	16		-		25	30	60		20		-		35		-		
	18		-	17	28		60		22		-		38		-		
	19		-			30		-		24		-		40		-	
	20		47		32		-		25		-		42		-		
	22	30	-		35		-	21	28	30	75		19		-		
	24		-		38		-			30		-		20		-	
	25		-		19		-		32		-		22		-		
	28		-		20		-		35		-		24		-		
	30		49		22		-		38		-		25		-		
32		51		24		-		40		-	25	28	30	80			
		-		25		-		42		-			30		-		
14	15		-	18	28	30	70		19		-		32		-		
	16		-			30		-		20		-		35		-	
	18		-		32		-	22	22	30	80		38		-		
	19	30	52		35		-			24		80		40		-	
	20		52		38		-		25		-		42		-		
	22		-		40		-		28		-				-		
	24		-				-				-				-		
25		-				-				-				-			

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


3/4" x 7/16" 12B-1 19,05 x 11,68 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	19,05	11,68	12,07

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	19	2	11,1	-	-	-	-

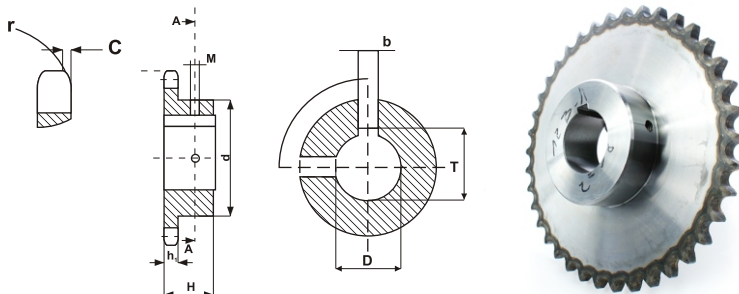

Mat. Stal C45 E - UNI EN 10083-1

ISO R606/ DIN 8187

Z	D	H	d	Z	D	H	d	Z	D	H	d	Z	D	H	d
10	19	30	-	14	32	35	-	19	40	35	-	22	38	40	-
	20		42		35		64		42		80		40		-
	24		42		38		-		25		-		42		90
	25		-		40		67		28		-		45		90
	28		45		19		-		30		-		48		-
	30		47		20		-		32		-		50		-
	32		49		22		-		35		-		25		-
11	19	35	-	15	24	35	-	19	38	35	80	23	28	40	-
	20		46		25		-		40		-		30		-0
	24		46		28		70		42		-		32		-
	25		-		30		-		45		-		35		-
	28		49		32		-		48		-		38		90
	30		51		35		-		50		-		40		-
	32		53		38		-		25		-		42		-
12	19	35	-	16	40	35	-	20	28	35	-	24	45	40	-
	20		-		19		-		30		-		48		-
	22		-		20		-		32		-		50		-
	24		-		22		-		35		-		25		-
	25		-		24		-		38		80		28		-
	28		-		25		-		40		-		30		-
	30		-		28		-		42		-		32		-
	32		53		30		-		45		-		35		-
	35		56		32		-		48		-		38		90
13	19	35	-	17	35	35	-	21	50	28	-	25	40	40	-
	20		-		38		-		25		-		42		-
	22		-		40		-		28		-		45		-
	24		-		25		-		30		-		48		-
	25		-		28		-		32		-		50		-
	28		58		30		-		35		-		25		-
	30		-		32		-		38		28		28		-
	32		-		35		80		40		-		30		-
	35		-		38		-		42		-		32		-
	38		-		40		-		45		-		35		-
14	19	35	-	18	42	35	-	14	48	40	-	25	38	40	-
	20		-		25		-		50		-		40		-
	22		-		28		-		25		-		42		-
	24		-		30		-		28		-		45		-
	25		-		32		80		30		90		48		-
	28		-		35		-		32		-		50		-
	30		-		38		-		35		-		-		-

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


1" x 17,02 mm 16B-1 25,4 x 17,02 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	25,4	17,02	15,88

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	26	2,5	16,2	-	-	-	-

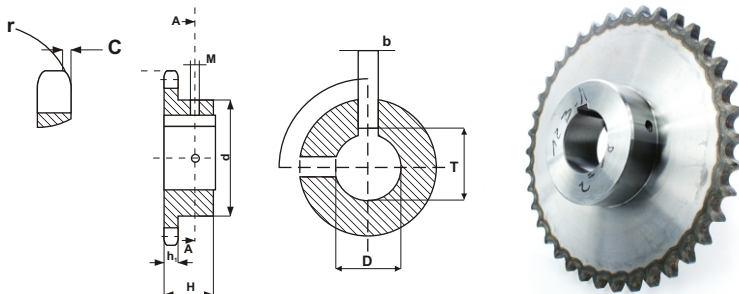

Mat. Stal C45 E - UNI EN 10083-1

ISO R606/ DIN 8187

Z	D	H	d	Z	D	H	d	Z	D	H	d	Z	D	H	d
	25	-	-	30	-	-	-	18	48	45	100		38	-	-
	28		42	32					50		100	22	40		-
	30		61	35					25		-		42	50	-
11	32	40	-	38					28		-		45		-
	35		-	40	40	92			30		-		48		-
	38		65	42					32		-		50		-
	40		67	45					35		-		25		-
	42		69	48				19	38	45	100		28		-
	25		-	50					40		-		30		-
	28		-	25					42		-		32		-
12	30	40	-	28					45		-		35		-
	32		69	30					48		-	23	38	50	110
	35		69	32					50		-		40		-
	38		-	35					25		-		42		-
	40		-	38	45	100			28		-		45		-
	42		-	40					30		-		48		-
	25		-	42					32		-		50		-
	28		-	45					35		-		25		-
	30		-	48				20	38	45	-		28		-
	32		-	50					40		-		30		-
	35		-	25					42		-		32		-
13	38	40	78	28					45		-		35		-
	40		-	30					48		-	24	38	50	110
	42		-	32					50		-		40		-
	45		-	35					25		-		42		-
	48		-	38	45	100			28		-		45		-
	50		82	40					30		-		48		-
	25		-	42					32		-		50		-
	28		-	45					35		-		25		-
	30		-	48				21	38	50	110		28		-
	32		-	50					40		-		30		-
	35		-	25					42		-		32		-
14	38	40	84	28					45		-		35		-
	40		-	30					48		-	25	38	50	110
	42		-	32					50		-		40		110
	45		-	35	45	100			25		-		42		-
	48		-	38		100			28		-		45		-
	50		-	40				22	30	50	110		48		-
15	25	40	92	42					32		-		50		-
	28		92	45					35		-				-

KOŁA ŁAŃCUCHOWE Z OTWOREM TOLEROWANYMI ROWKIEM WPUSTOWYM


1" x 1/4 x 3/4" 20B-1 31,75 x 19,56 mm

ŁAŃCUCH

	Podziałka	Szerokość wew.	Rolka Ø
ISO mm	31,75	19,56	19,05

KOŁO ŁAŃCUCHOWE

	r	C	h ₁	L	h ₂	h ₃	H
ISO mm	32	3,5	18,5	-	-	-	-

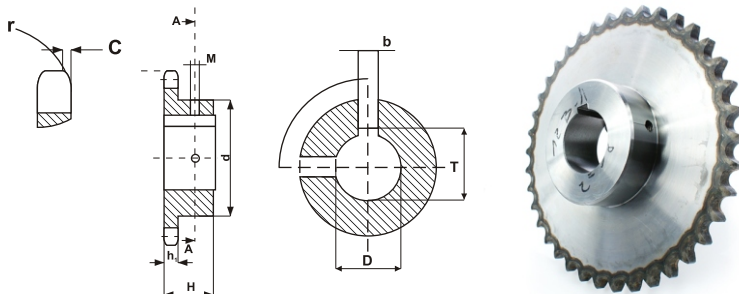

Mat. Stal C45 E - UNI EN 10083-1

Z	D	H	d
	25		-
	30		-
09	32	40	63
	35		-
	38		-
	25		-
	30		-
10	32	40	70
	35		-
	38		-
	25		-
	28		-
	30		-
	32		-
	35		77
11	38	45	-
	40		-
	42		-
	45		-
	50		82
	60		93
	25		-
	28		-
	30		-
	32		-
	32		-
12	38	45	88
	40		-
	42		-
	45		-
	48		-
	50		-
	60		93
	25		-
13	28	45	98
	30		-

ISO R606/ DIN 8187

Z	D	H	d
	32		-
	35		-
	38		-
	40		-
13	42	45	98
	45		-
	48		-
	50		-
	60		-
	32		-
	35		-
	38		-
	40		-
14	42	45	108
	45		-
	48		-
	50		-
	60		-
	32		-
	35		-
	38		-
	40		-
15	42	45	118
	45		-
	48		-
	50		-
	60		-
	38		-
	40		-
	42		-
	45		-
16	48	50	120
	50		120
	60		-
	65		-
	70		-

Z	D	H	d
	38		-
	40		-
	42		-
	45		-
17	48	50	120
	50		-
	60		-
	65		-
	70		-
	38		-
	40		-
	42		-
	45		-
18	48	50	120
	50		-
	60		-
	65		-
	70		-
	38		-
	40		-
	42		-
	45		-
19	48	50	120
	50		-
	60		-
	65		-
	70		-
	38		-
	40		-
	42		-
	45		-
20	48	50	-
	50		-
	60		-
	65		-
	70		-